


## MB491SKL-1B



Scan the QR code for more product information

Copyright © ICY DOCK International. All Rights Reserved.



Cremax Europe GmbH  
Email: support@icydock.com  
Weidenweg 21H, 47059 Duisburg, Germany



Beyond Technologies UK Ltd  
Email: info@beyondtech.co.uk  
Unit B6, Halesfield 11, Telford, Shropshire, TF7 4PH, U.K.

### 1

#### Package Contents • Packungsinhalt • Contenu • Contenido del paquete


• 包装について • 包装説明 • 包装说明



MB491SKL-1B



User Manual



Key x 2



6 x M3\*4 Pan Head Screws for MB491SKL-1B (2 x screw for spare parts)



6 x M3\*4 Flat Head Screws for 2.5" HDD/SSD (2 x screw for spare parts)


**Note:** Please use the included screws to secure the MB491SKL-1B & drive

### 2


#### Device Information • Geräteinformationen • Informations dispositif

• Información del dispositivo • 本体説明 • 機體説明 • 机体说明

##### ▼ Front View

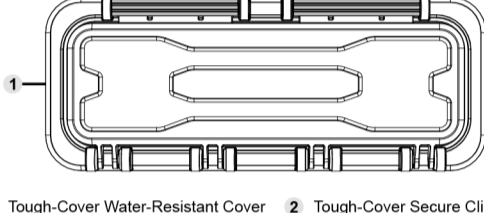


1 Tough-Cover Water-Resistant Cover 2 Tough-Cover Secure Clip

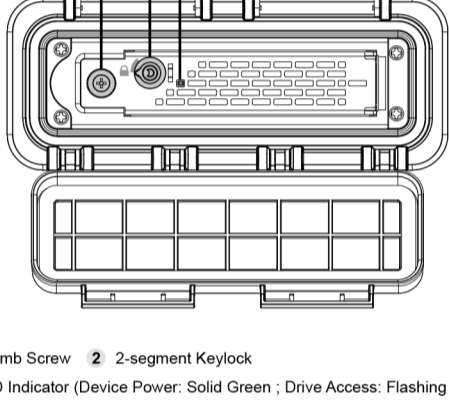

1 Thumb Screw 2 2-segment Keylock 3 LED Indicator (Device Power: Solid Green ; Drive Access: Flashing Amber)

##### ▼ Rear View




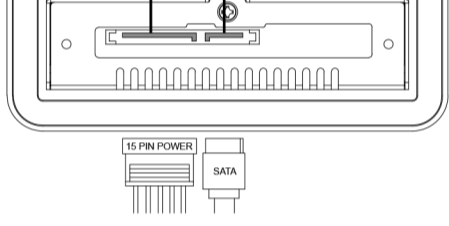


1 15-Pin Power Connector 2 7-Pin SATA Connector




### 3

#### Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación


• 製品の組み込み手順について • 操作手順 • 操作步驟







Rotate the thumb screw counterclockwise to release the handle of the 2.5" drive tray.



This device accommodates drives with up to 15 mm height. Please insert the HDD or SSD into the tray.



Please use the included M3\*4 flat head screws only.



Rotate the thumb screw clockwise to tighten it and secure the 2.5" drive tray in place.

### 4

#### Device Installation • Installation eines Gerätes • Installation du dispositif

• Instalación del dispositivo • デバイス取付手順 • 装置安裝步驟

• 设备安裝步驟

##### ⓘ Note:



Prior to installing the MB491SKL-1B, please clean the case surface thoroughly, preferably using alcohol. This ensures the 3M adhesive adheres properly, providing essential water resistance. For the most effective waterproofing, apply the 3M adhesive in an environment with a temperature above 10°C. Keep in mind that peak adhesion is typically achieved within 72 hours post-application.

##### ⓘ Note:


● Please note that the water-resistant function only applies to the water-resistant cover (Tough-Cover) of the MB491SKL-1B. The device itself does not have water-resistant function. The main function of this design is to prevent low-pressure water from entering the device through the water-resistant cover. To ensure the device is properly installed, please make sure the system chassis where the MB491SKL-1B is installed has a flat and smooth surface around the 3.5" device bay to prevent water from entering the device or system through uneven surfaces.

● The water-resistant feature of the MB491SKL-1B is not permanent and may degrade over time.

● We recommend using a wide-temperature HDD/SSD with the MB491SKL-1B to ensure the drive's operation is not affected by extreme temperatures.



1. Remove the protective layer from the 3M adhesive and affix the MB491SKL-1B to your chosen external 3.5" bay location on the case.

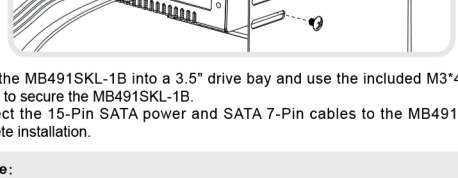

2. Insert the MB491SKL-1B into a 3.5" drive bay and use the included M3\*4 pan head screws to secure the MB491SKL-1B.

3. Connect the 15-Pin SATA power and SATA 7-Pin cables to the MB491SKL-1B to complete installation.

##### ⓘ Note:

● Please note that the water-resistant function only applies to the water-resistant cover (Tough-Cover) of the MB491SKL-1B. The device itself does not have water-resistant function. The main function of this design is to prevent low-pressure water from entering the device through the water-resistant cover. To ensure the device is properly installed, please make sure the system chassis where the MB491SKL-1B is installed has a flat and smooth surface around the 3.5" device bay to prevent water from entering the device or system through uneven surfaces.

● The water-resistant feature of the MB491SKL-1B is not permanent and may degrade over time.

● We recommend using a wide-temperature HDD/SSD with the MB491SKL-1B to ensure the drive's operation is not affected by extreme temperatures.

