


Copyright © ICY DOCK International. All Rights Reserved. 6502682 VER 3.0

1 Package Contents • Packungsinhalt • Contenu • Contenido del paquete • 包装について • 包装説明 • 包装说明




2 Device Information • Geräteinformationen • Informations dispositif • Information del dispositivo • 本体説明 • 機體説明 • 机体说明

▼ Exterior View

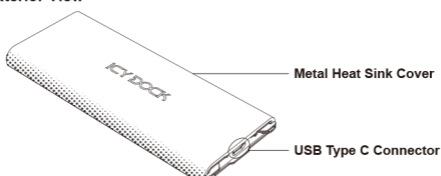


▼ Interior View

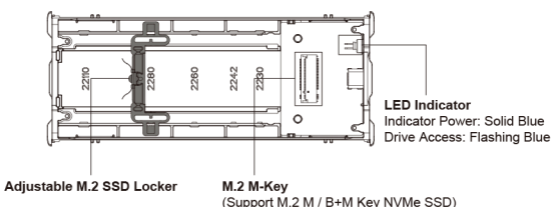


3 Installation Guide • Installationsanleitung • Guide d'Installation • Guía de instalación • 製品の組み込み手順について • 操作步驟 • 操作步驟

3-1




Remove the heat sink cover.

3-2



Slide the adjustable locker to different lockpoints (2230 / 2242 / 2260 / 2280 / 22110) according to your SSD's length.

3-3



1. Insert the M.2 SSD diagonally into the device connector.
2. Press down the M.2 SSD to secure with the adjustable locker.

3-4



(Optional) Remove the protective films and then paste the small piece thermal pads to the chip(s) that is thinner than others. You want to make sure all chips are at the same height for best conductive heat transfer.

3-5




Paste the thermal pad onto the M.2 SSD after removing the protective film.

3-6



Place the removed heat sink cover back onto the device.

3-7



Choose either USB Type A or Type C cable based on your system interface. Next, connect the cable to the device and your system's USB connector.

